



ECO.NO	ZONE	DETAILS	DESIGN	DATE
00060				2007-9-20
S19004		删除 "Printed in China"		2019-4-19

Notes:

1. Material: 80g printing paper, white.size 290*210MM.
2. Printing: Black
3. Pack and tie a label with part number 0-ML00-0020-01-1.

	 青嶸科技有限公司 A&R Technologies Ltd.							
	DIMENSION TOLERANCES UNLESS OTHERWISE SPECIFIED		CLIENT	PART NAME		英文版说明书		
	>0.0AND≤5	+/-0.055mm	MOULD NO	MV-620	PART NO		0-ML00-0020-01-1	
	>5AND≤10	+/-0.060mm	MATERIAL	REV	2	DESIGN	范绮玲	DATE
	>10AND≤25	+/-0.075mm	SIZE	/	SCALE	/	CHECK	DATE
	>25AND≤50	+/-0.100mm	SHEET	UNIT	mm	APPROVAL	DATE	
>50AND≤100	+/-0.150mm							
>100AND≤150	+/-0.200mm							
>150	+/-0.250mm							
Angular	+/-0.25°							

MV-620 X-TEC™ Motion Sensor

Operation and Specifications

SUREN

The MV-620 is a professional state-of-the-art motion sensor engineered with the world's best components and materials. Every aspect of this sensor provides the most reliable motion sensing with freedom from false detection. The MV-620 microwave system includes a modern, compact, DRO-based micro-strip Doppler transceiver, with PCB "patch" antennas. The Doppler signal is digitally processed to detect motion and reject distractions. Constant-motion signals (such as fans) are de-emphasized, and fluorescent light frequencies are digitally removed.

SENSOR INITIALIZATION

Following power-on, a MV-620 sensor is fully operational after a two-minute warm-up. During warm-up, its red LED is ON.

WALK TEST:(RED LED)

Note: The MV-620 should be tested once per year.

In Normal Operating Mode: Enable the LED(JP1 ON). If the LED is not enabled, then, without removing power, set JP1 to ON. Walk across the monitored area. The red LED should turn ON (for motion-detection) after about three to five normal steps. Then, wait 12 seconds before continuing the walk-test. When there is no motion in the monitored area, the LED should remain OFF.

In Special Mode: Cycle power-off/power-on, then Walk-test immediately after warm-up, in the 10-minute walk-test mode.

10-MINUTE WALK-TEST MODE

When JP1 is OFF, the function of the microwave motion sensing system can be monitored separately during the first 10 minutes after power-on. To test the microwave system, set JP2 ON, then move within the monitored area. During movement, the yellow LED should flash. Each flash represents a microwave signal processing event, yet not necessarily motion detection. Adjust RV1 to change microwave detection range as required. 10 minutes after power-on, all LEDs will be disabled. To test actual detection range, walk test by using the red LED.

REMOTE LED ENABLE

The Remote LED Enable terminal functions exactly in parallel with JP1, in a logical OR arrangement. Thus, if either JP1 is ON or if the Remote LED Enable terminal is fed its LOW (active) voltage, then the LED is enabled. The LOW (LED enabled) voltage range is 0-1.5 Vdc. The HIGH (LED disabled) voltage range is 3.5-18 Vdc.

MOTION-DETECTION PROCESSING

The MV-620 sensor's digital signal processing includes general noise filtering, as well as special filters to remove 50/60Hz interference from fluorescent lights. In addition, constant-motion background signals are characterized and then ignored, so as better to detect actual new motion within the monitored area.

SUPERVISION

MV-620 supervision functions include these tests:

- Ambient temperature in-range;
- Supply voltage between 8-16Vdc;

When a failure is detected, then:

- 1) The red LED blinks ON/OFF every second;
- 2) Relay does not re-close after a motion detection.
- 3) Trouble output opens.

NOTE: The sensor will NOT open its relay upon failure.

Limitations of Security Products: Security products and alarm systems do not offer guaranteed protection against burglary, fire, or other emergencies. They may fail to warn for diverse reasons, including (but not limited to): power failure, dead batteries, improper installation, coverage "blind spots", coverage areas overlooked during installation, defeat by technically sophisticated intruders, component failure, or inadequate maintenance. Alarm systems should be checked weekly to ensure that all devices are working properly. AN ALARM SYSTEM IS NOT A SUBSTITUTE FOR INSURANCE.

SUREN LIMITED WARRANTY


SUREN Systems, Ltd., of Fo Tan, Shatin, Hong Kong, warrants its products to be in conformance with its own plans and specifications and to be free from defects in materials and workmanship under normal use and service for twelve months from the date of original purchase. Seller's obligation shall be limited to repairing or replacing, at its option, free of charge for materials or labor, any part which is proved not in compliance with Seller's specifications or proves defective in materials or workmanship under normal use and service. Seller shall have no obligation under this Limited Warranty or otherwise if the product is altered or improperly repaired or serviced by anyone other than Seller. For warranty service, return transportation prepaid, to SUREN Systems, Ltd., Unit 15, 12/F, Block B, Wah Sang Industrial Building, 14-18 Wong Chuk Yeung Street, Fo Tan, Shatin, Hong Kong. Seller has no obligation to attend the buyer's location to retrieve the goods or make repairs on site.

There are no warranties, expressed or implied, of merchantability, or fitness for a particular purpose or otherwise, which extend beyond the description on the face hereof. In no case shall seller be liable to anyone

SPECIFICATIONS

Range: 15 meters

Sensor Motion-detection Pattern (top view, in meters)

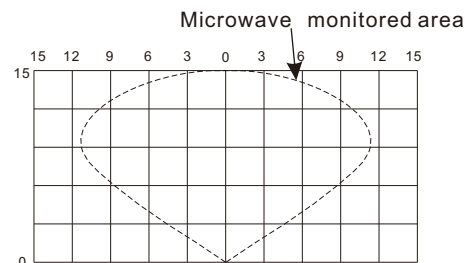

Power Supply:
8-16 Vdc; 15 mA at 12 Vdc

Relay:
Solid state, 60V, 50 mA,
1500 V_{rms} isolation

Tamper Switch:
Form A (NC). 50 mA at 30 Vdc

Trouble:
Normally closed to (-), NPN
open collector, 30 Vdc, 100mA

Housing Material:
High-impact ABS

Dimensions:
112 x 50 x 42 mm (H x W x D)

Lighting Rejection:
Selectable: 50 or 60 Hz

Approvals/qualification:
CCC (Pending)
CE (Pending)

Microwave Operating Freq:
Around 10 GHz. See unit label

RF Immunity:
20 V/m, 10-1000 MHz;
10 V/m, 1-2 GHz

Range: Microwave
20%-100% adjustable

Operating Temperature Range:
-10°C to +55°C (+14°F to +131°F)

Storage:
-40°C to +60°C (-40°F to +140°F)

Accessories:
Mounting bracket:
MB-100

Note: Specifications are subject to change without notice.

for any consequential or incidental damages for breach of this or any other warranty, express or implied, or upon any other basis of liability whatsoever, even if the loss or damage is caused by its own negligence or fault.

Seller does not represent that the products it sells may not be compromised or circumvented; that the products will prevent any personal injury or property loss by burglary, robbery, fire or otherwise; or that the products will in all cases provide adequate warning or protection. Customer understands that a properly installed and maintained alarm system may only reduce the risk of a burglary, robbery, or fire without warning, but it is not insurance or a guarantee that such will not occur or that there will be no personal injury or property loss as a result.

Consequently, seller shall have no liability for any personal injury; property damage or other loss based on a claim the product failed to give any warning. However, if seller is held liable, whether directly or indirectly, for any loss or damage arising under this limited warranty or otherwise, regardless of cause or origin, seller's maximum liability shall not in any case exceed the purchase price of the product, which shall be the complete and exclusive remedy against seller.

This warranty replaces any previous warranties and is the only warranty made by Seller on this product. No increase or alteration, written or verbal, of the obligations of this Limited Warranty is authorized.

Patents US: 7,141,910; 7,042,134; China: ZL 2005 3 0146970. 4, other Patents issued and pending worldwide.

MV-620 Installation Instructions

1: Mounting Location

A. Wall mounting:

1. Sensor base fastened flat on vertical wall (± 2 degrees)


B. Bracket mounting:

1. Bracket fastened to semi-vertical surface (± 15 degrees)
2. Sensor on bracket in vertical position (± 2 degrees)

C. All mounting:


1. Height = 2-3 m above floor of monitored area
2. Clear line-of-sight from sensor to monitored area

Note: metal will block microwave sensor's view

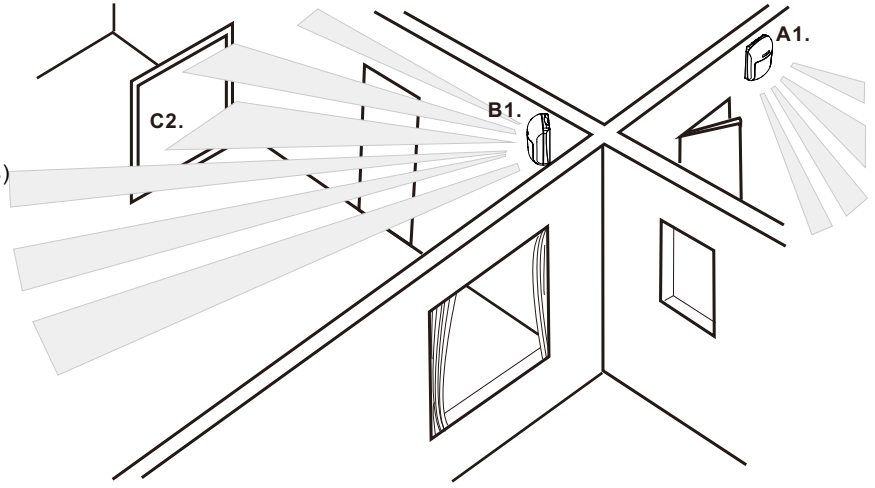


2: Sensor Disassembly

In slot at sensor bottom, use screwdriver or thumbnail to (1.) Push inward on cover latch. (2.) Remove cover. (3.) Push outward on circuit board latch at sensor base right side. Using circuit board terminal block as handle, gently lift circuit board right side and remove.

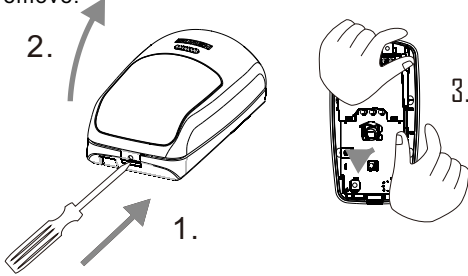


3: Base Hole Preparation

Identify necessary holes on diagram; 1. For wall mounting, knock out hole covers. 2. For corner or 45 degree wall mounting, use drill to open at least two holes at base side depressions. 3. For bracket mounting. See 6 for more. If cable ties will be added for wire strain relief, select holes needed, then clear out thin plastic material covering those holes.

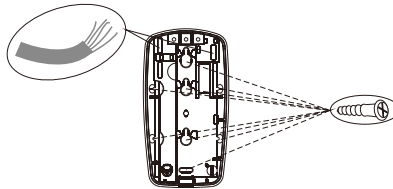


4: Cable Preparation

Remove 8 cm of cable jacket. Pass the cable wires through the selected hole. Lay cable in wire channel. Secure cable with cable tie.

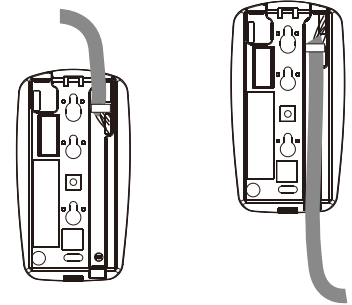

5: Wall Mounting

Use screws to mount on wall or in corner.




Set circuit board alignment post in position "0".



2.3m Alignment Post position "0"


6: Bracket Mounting

Use screws to mount bracket in desired location, use tool to open a 3 mm hole in the center of the square recess at the rear of the base. Use screw to mount sensor base onto bracket. Refer to 5 for setting circuit board alignment post.



7: Circuit Board Installation

To replace circuit board, (1.) place circuit board left edge into two left-hand mounting slots in sensor base. (2.) On right-hand side, gently press circuit board into place until latch snaps over circuit board. Cut cable wires to appropriate length and connect wires/EOL resistor to sensor terminal block.

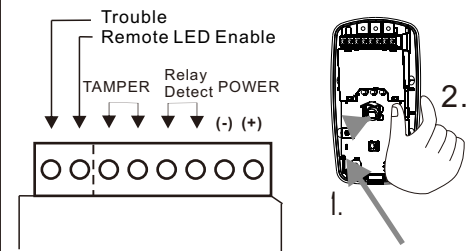

8: Operation Programming Jumpers

Set JP1 to enable or disable the red LED, as required. Set JP2 to enable or disable the 10-minute test. If fluorescent lights are present, then set JP3 according to the mains power frequency. Factory-set jumper positions are shown below in gray.

MV-620			
FUNCTION	JP	ON	OFF
Light Imm.	3	60Hz	50Hz
10-min. test	2	DISABLE	ENABLE
Red LED	1	ENABLE	DISABLE

9: Microwave Range Adjustment

Adjust RV1 clockwise to increase microwave detection range.



RV1

10: Red LED Indicator Operation

The chart below shows possible LED indications.

LED	MV-620	
	Sensor State	LED Display
Red	Warm-up	ON
	Detection	ON 5 Seconds (IF LED ENABLED)
	Failure	Flashing
	Normal	OFF
Yellow	MW Event (IN10-M TEST MODE)	ON
	NO Event	OFF